
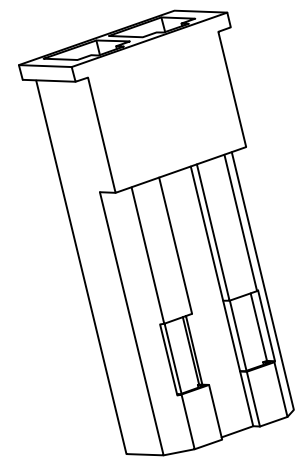
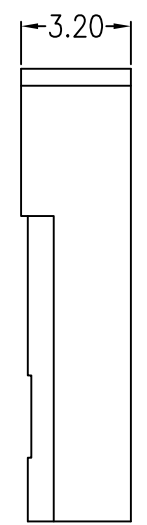
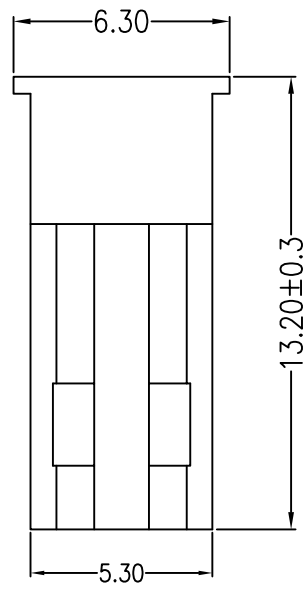



REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2013.08.05



Rubber shell I

主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

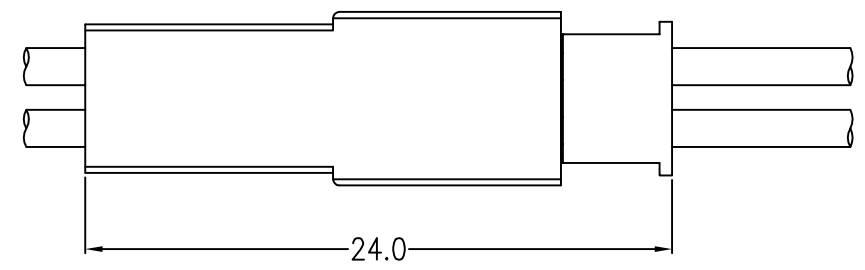

Assembly Layout

C					
B					
A	PEDESTAL	1 PCS	PA66		
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
				TITLE: -	
X.±0.5	X.±5'	USE:	CUSTOMER		
.X±0.3	.X±2'	APPD:	PART NO.: EC-C-2502-WW-A-R-RED		
.XX±0.25	.XX±1'	CHKD:	DWG NO.:		
--	--	DR:	SCALE	SHEET	
	UNITS: mm		1 : 1	1 / 1	