






| REV | DESCRIPTION | DESIGN | DATE |
|-----|-------------|--------|------------|
| A0 | Release | | 2016.07.04 |

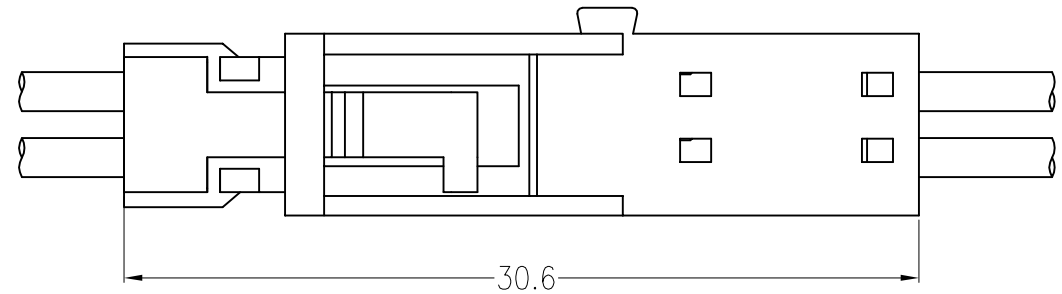

Assembly Layout

主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐 电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

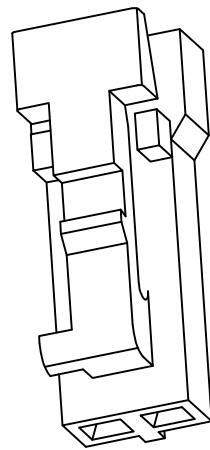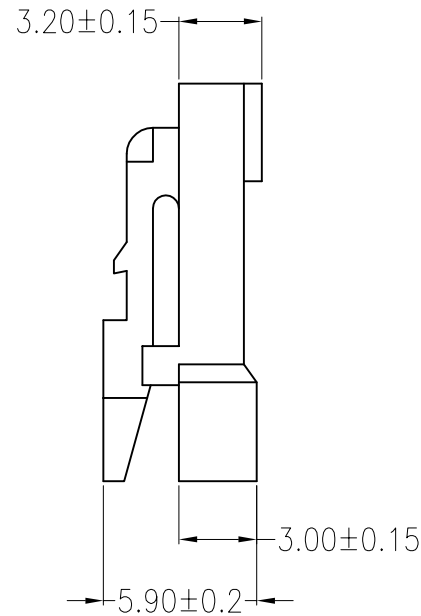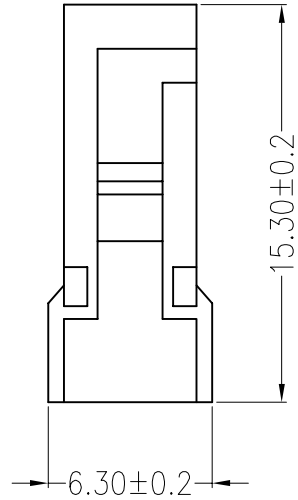

| C | | | | |
|------|-----------|-------|----------|--------|
| B | | | | |
| A | PEDESTAL | 1 PCS | PA66 | |
| ITEM | COMPONENT | Q'TY | MATERIAL | FINISH |

| | | | | |
|---|-----------|---------------|-----------------------------|-------------|
|  易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd. | | | TITLE: - | |
| X.±0.5 | X.±5' | USE: CUSTOMER | PART NO.: EC-C-25402-WW-A-R | |
| .X±0.3 | .X±2' | | DWG NO.: | |
| .XX±0.25 | .XX±1' | APPD: | | |
| -- | -- | CHKD: | | |
|   | UNITS: mm | DR: | SCALE 1 : 1 | SHEET 1 / 1 |