
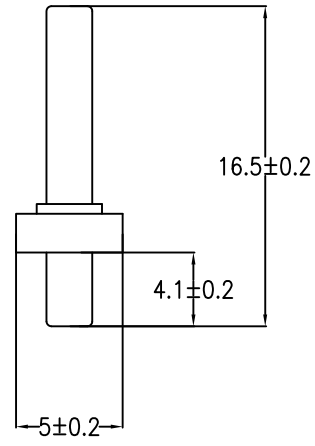


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2017.10.12

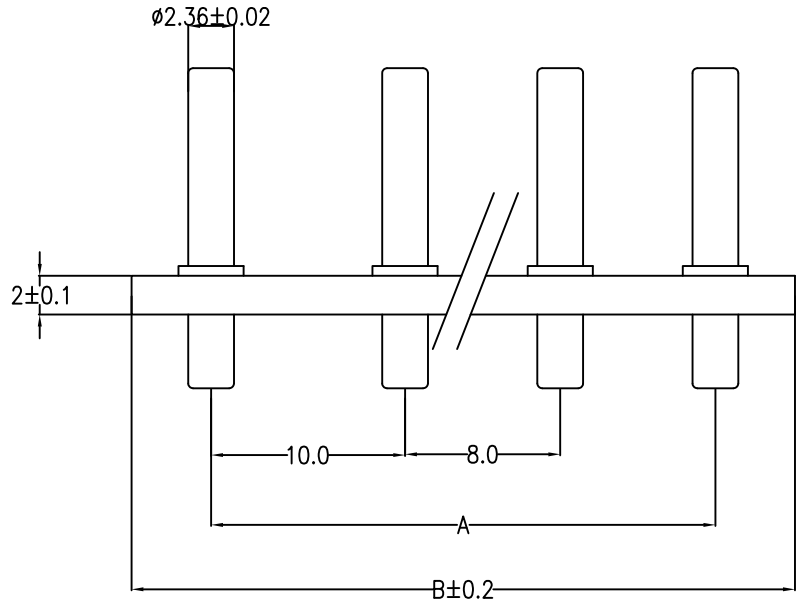

主要技术参数 Main Specifications

- 线 数 (Poles): 2 to 6
- 接触电阻 (Contact resistance): $\leq 10m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 5.0A AC DC
- 耐 电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

孔位	A	B
2	10.0	18.2
3	18.0	26.2
4	26.0	34.3
5	34.0	42.8
6	42.0	51.0

C				
B	CONTACT	2~6 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	COLOR:GRAY
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
				TITLE: 10.0/8.0mmPITCH 180°WAFER
X.±0.5	X.±5'	USE:	CUSTOMER	
.X±0.3	.X±2'	APPD:		
.XX±0.25	.XX±1'	CHKD:		
--	--	DR:		
		UNITS: mm	SCALE	SHEET
			1 : 1	1 / 1