




- NOTE:** 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. GENERAL TOLERANCE:±0.2mm
 3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
 Δ COVER:UL94V-0 PBT Thermoplastic(Red Black.Blue)
 Δ ACTUATORS UL94V-0 PBT Thermoplastic(White)
 Δ CONTACT PLATING:Gold plating over nickel
 Δ PITTING MATERIAL Epoxy

Δ ELECTRICAL

Electrical:2000 operations per switch-
 24 VDC,25mA.
 Non-Switching Rating:100mA,50VDC.
 Switching Rating 25mA,24VDC.
 Contact Resistance:50mΩ max. at initial.

Δ MECHANICAL

Mechanical life: 2000 operations per swith.
 Stroke: 2.0mm.
 Operation Temp: -25℃ to 70℃
 Storage Temp: -40℃ to 85℃.

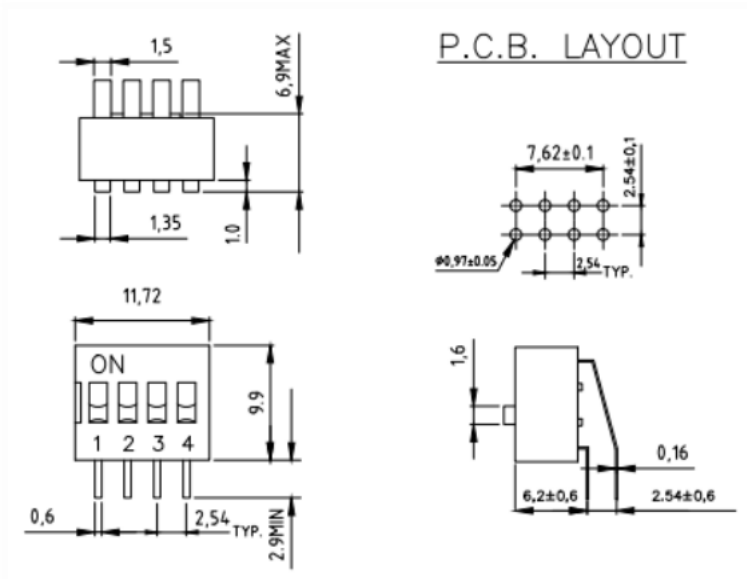

Easychips Precision Technology Co., Ltd

TITLE	DIP SWITCH	Rev	2.0	SCALE	FIT
MODEL NO.	BCDA04	D'SGD		Unit	mm
TOLERANCE UNLESS OTHERWISE STAGED	0.1-10 ±0.05 10-50 ±0.1 50-100 ±0.2 100-200 ±0.3	CHKD	=	DATE	
		APPD		DATE	

Δ		
Δ		
MARK	REMARKS	DATE

1 2 3 4 5 6 7 8