
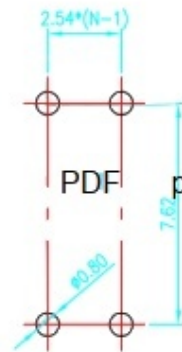

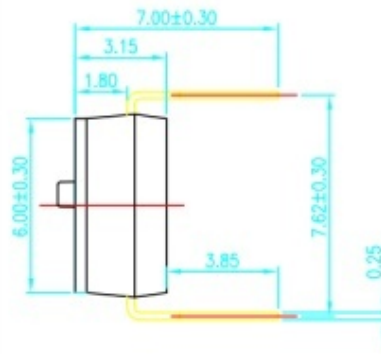



NOTES :
1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-30°to+85°
- 3>.Storage Temperature:.-40°to+85*
- 4>Mechanical Life:3000cycles minimum

2.PLATNG
GOLD FLASH 1u"(min)SOLDERTAIL,
3u"GOLD PLATING ON THE CONTACT AREA,
WTH 50u"NCKEL UNDERPLATINGOVERALL

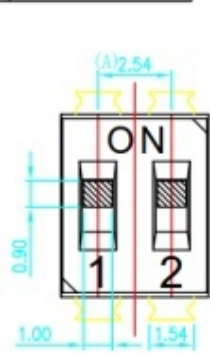


[Schematic]



PDF pdfFactory Pro SM SWITCH CO.,LTD

RFD00MDNDED PC B LAYOUT(TOP VIED)



Nmbe	Part Name	Material	Finished	FOLEANCE UNLE		SPEcmoN COPY	Eaychips Precision Technolo gy Co,Ltd
				UNER	om*		
②	Actuator	UL94V0		00=015	0010.5	PRAT NO.	BYDTH SERIES PITCH254mm
③	Cover	UL94V	Black				
④	Movoble	Copper Alloy	3uGold				
⑤	Terminal						
⑥		Bras ⁵					