
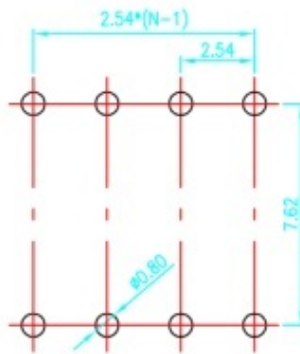
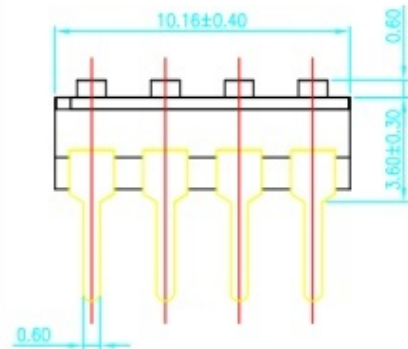
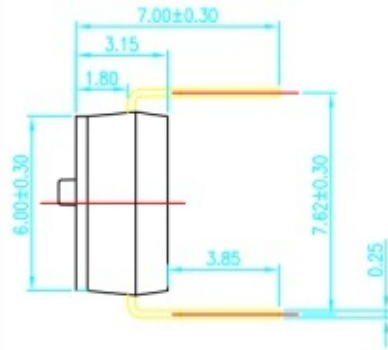


PRODUCT	M0.	RoES compliant
---------	-----	----------------

PEv.	ENNO	DR.	DATE
------	------	-----	------

ECDTH0
4

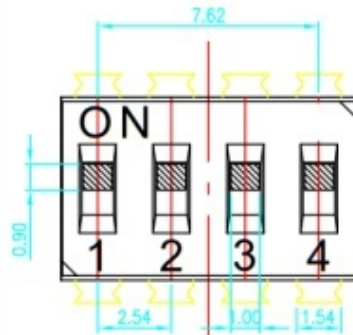

RECOMMENDED PCB LAYOUT (TOP VIEW)



NOTES :

1. Specification:
- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature:-30°to+85°
 - 3>.Storage Temperature:;-40°to+85°
 - 4>.Mechanical Life:3000cycles minimum

2.PLATING:

- GOLD FLASH 1u"(min.)SOLDERTAIL
3u"GOLD.PLATING ON THE CONTACT AREA,
WTH 50u"NICKEL,UNDERPLATINGOVERALL

[Schematic]



Number	Part Name	Material	Finish
①	Actuator	UL94 VO	White
②	Cover	UL94 V	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤			
⑥	Terminal Contact		3u"Gold

TOLERANCE UNLESS		SPECIFICATION COPY	Eaychips Precision Technology Co.Ltd
ϕ =0.25	ANGLES		
	\pm 0.1		BYDTH SERIES PITCH 254mm
R00#010			
ESCN	WORKING	20120412	NO
RAWING			ECDTH04

		HLE1	REV.
A4	mm	(TOP)	A