

PRODUCT NO.  
**ECD1S02**

RoHS compliant

V	DR	TR
RE	DA	




NOTES :

1.Specification:


- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-30°to+85°
- 3>.Storage Temperature:-40°to+85°
- 4>.Mechanical Life:3000cycles minimum

2.PLATING:


GOLD FLASH 1u"(min.)SOLDERTAIL  
3u"GOLD PLATING ON THE CONTACT AREA,  
WITH 50u"NICKEL UNDERPLATINGOVERALL

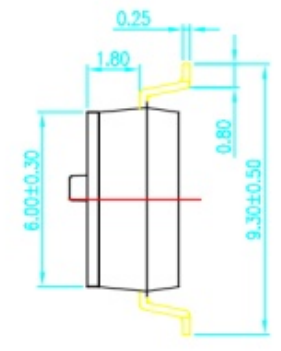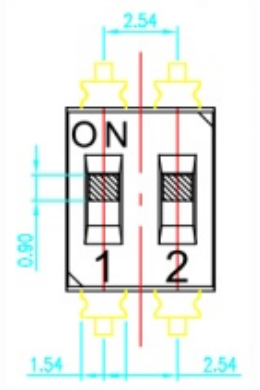


[Schematic]

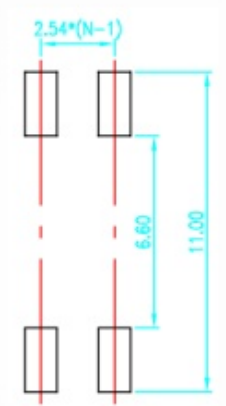

ROONEDED P.C.B.LAYOUT (TOP VIEW)



[推钮行程]



Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	NSPE cnoN cOPY	Easychips Precision Technology Co., Ltd
①	Actuator	UL94 V0	White	0±0.25	PolEcnomE	BY DTS SERIES PITCH 2.54mm
②	Cover	UL94 V0	Black	.00±0.15 . . 0±1		
③	Movable	Copper Alloy	3u"Gold	.00±0.5		
④	Terminal	Brass	1u"Gold		PRAT NO.	ECD1S02
⑤				RAWNG		DTS-02-A
⑥	Terminal Contact					UNIT SCALE SHEET REV.