

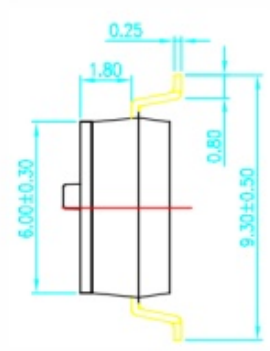


NOTES :


- 1.Specification:
- 1> Operating force:1000gf Max
 - 2> Operating Temperature:-30°to+85'
 - 3> Storage Temperature:-40'to+85'
 - 4> Mechanical Life:3000cycles minimum

2.PLATING:



GOLD FLASH 1u"(min.)SOLDERTAIL,
3u"GOLD PLATING ON THE CONTACT AREA,
WITH 50u"NICKEL UNDERPLATINGOVERALL.

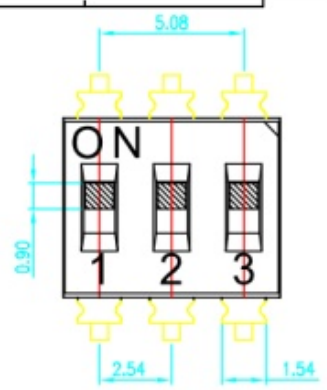

[Schematic]

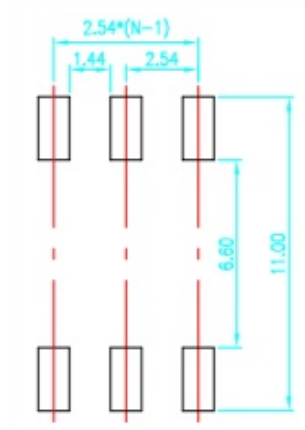

RF00MENDED P.C.B.LAYOUT (TOP VIE)



Num	Material	Color	Finish
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movoble	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Cold
⑤	Base		
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		
UNER	ANQES	
		0.0±1
000±0.10		.00±0.5*
ESICN		LU ER XN
RAMNC		
CHECK		

Easychips Precision Technology Co., Ltd
BYDTS ERES PITCH 2.54mm
ECDS03
TE NO.DTS-03-A
SZ mm 2 : 1 10P1 A

factory Pro