

PRODUCT	MO.	RoEScompliant
ECDIS04		

Ev	ECNN0	DR	DATE




NOTES :

1.Specification:


- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-30°to+85°
- 3>.Storage Temperature::-40°to+85°
- 4>Mechanical Life:3000cycles minimum

2.PLATING:



GOLDFLASH 1u*(min.)SOLDERTAIL,
3u*GOLDPLATING ON THE CONTACT AREA,
WTH50u*NICKEL UNDERPLATINGOVERALL

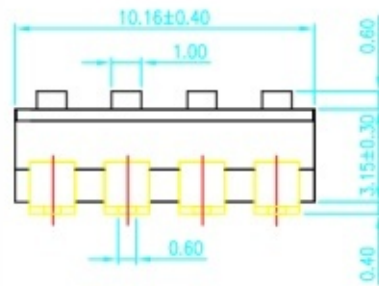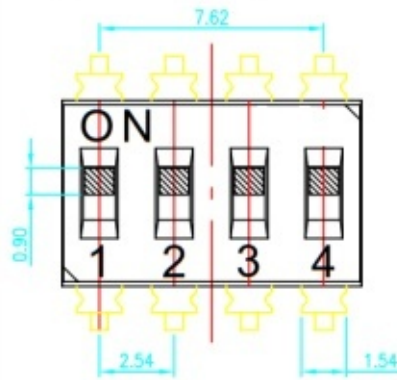

[Schematic]

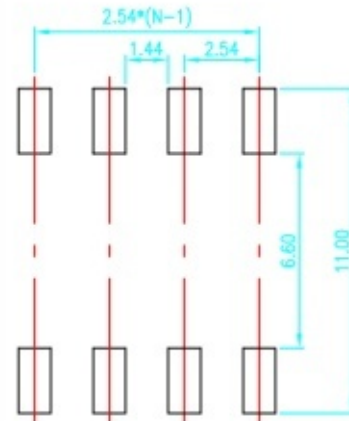

RECOMENDEDPCBLAYOUTCTOP IEW



Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		NSPECNO COPY	Easychips Precision Technology Co., Ltd	
				±0.25	ANGLES			
①	Acuator	UL94 VO	White			PROECHAN	BY DTS SERIES PTOH 2.54mm	
②	Cover		Black			申子		
③	Movable	Copper Alloy					EC-DIS	
④	Terminal	Brass	1u*Gold				04	
⑤	Base			RAWNG				
⑥	Terminal Conoct		3u*Gold	PPRO				
							UNIT SCALE SHEET	
							A4 mm	10F