


### SPECIFICATIONS:

Operating temperature range: -30°C to +85°C  
 Rating: Max 50 mA 12V DC  
 Insulation resistance: 100MΩ min. 100V DC  
 Dielectric strength: 100V. AC. 1Min  
 Contact resistance: 100mΩ Max  
 Life: 100,000 Cycles  
 Travel: 0.18±0.05mm  
 Operating force: 300±50gf

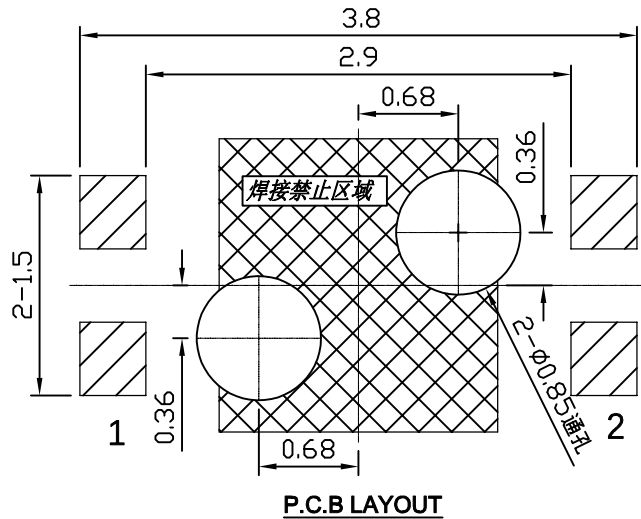

TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				WYJ	2024.03.28			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	ECTAF03-P	
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3	
X.XXX	±0.10	UNIT	mm			PRINT DATE	2024.04.11	
∠	±2°	SCALE	20:1					