



版次	变更内容	审核	日期


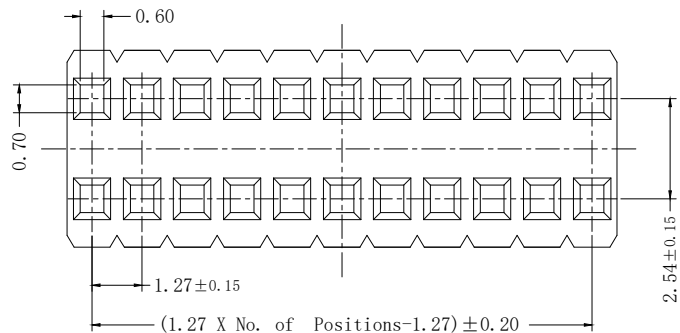


技术参数: SPECIFICATIONS

额定电流 (Current Rating): 1A
 绝缘电阻 (Insulation Resistance): 1000MΩ Min.
 接触电阻 (Contact Resistance): 20m Ω Max.
 额定电压 (Dielectric Withstanding Voltage): AC 500V
 工作温度 (Operating Temperature): -40 °C ~ +105°C
 最大加工温度 (Max Processing Temp): (230 °C for 30~60 seconds)
 (260 °C for 10 seconds)




接触材料 (Contact Material): 黄铜 (Brass), THICKNESS 0.40mm
 塑胶材料 (Insulator Material): 尼龙 (Nylon)-9T, UL 94V-0, 颜色: 黑色
 接触电镀 (Contact Plating): 镀金 (Gold plated)

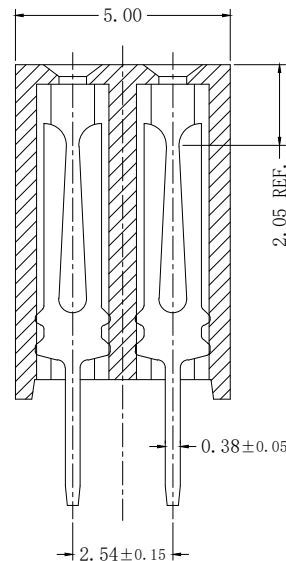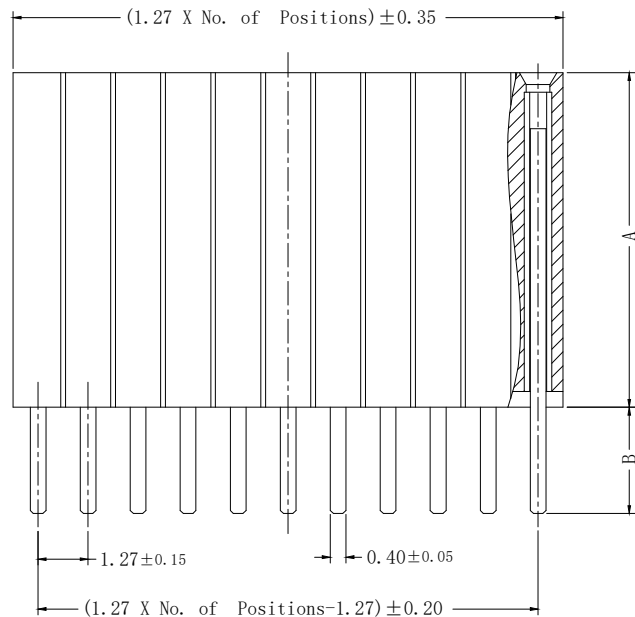

EC127D-F-1S-Y-1*xxP X-A /B

单排芯数: 01~50
 脚长: 2.7: 2.70mm
 塑胶高度: 8.5: 8.50mm
 接触电镀:
 G: 镀金Gold Flash
 1G: 镀金1u"
 3G: 镀金3u"
 10G: 镀金10u"

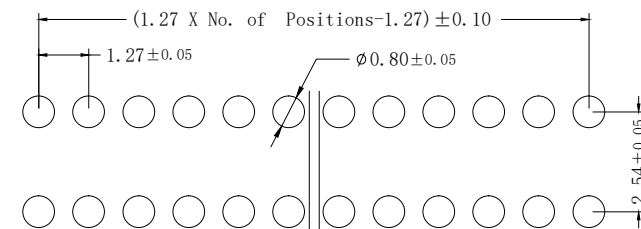

Recommended PCB Layout

弯曲度: 2*02P ~ 2*20P 0.30 MAX.
 2*21P ~ 2*35P 0.40 MAX.
 2*36P ~ 2*50P 0.50 MAX.

公差:	版次:	A	易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.				
. X ±0.35	比例:						
. XX ±0.25	单位:	mm	型号:	EC127D-F-1/A-S-Y-2*xxPX	A/B	签名	日期
. XXX ±2°	页码:	1/1	描述:	1.27双排Y端直脚排母	绘图:		
LNLB	图号:				确认:		
					审核:		