
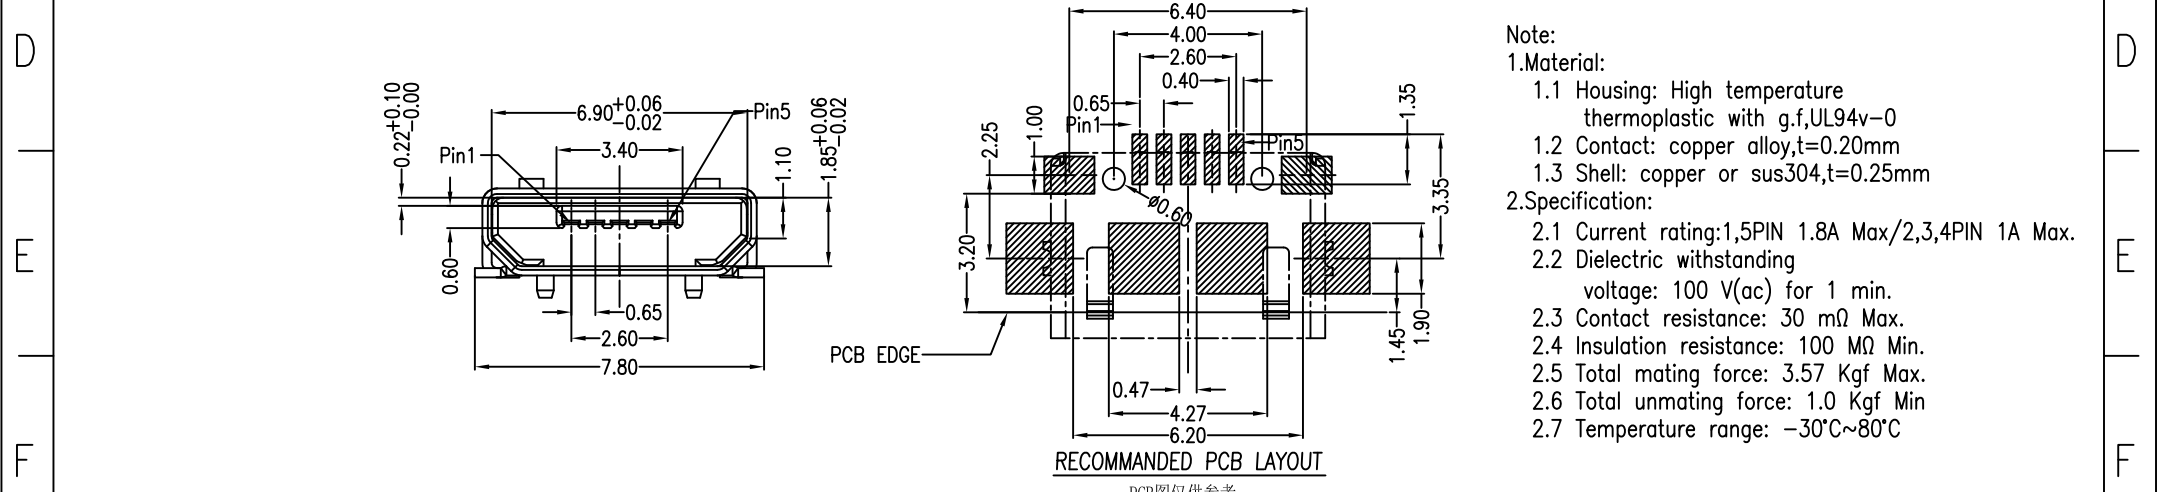


MAPX	MODIFICATION	DATE

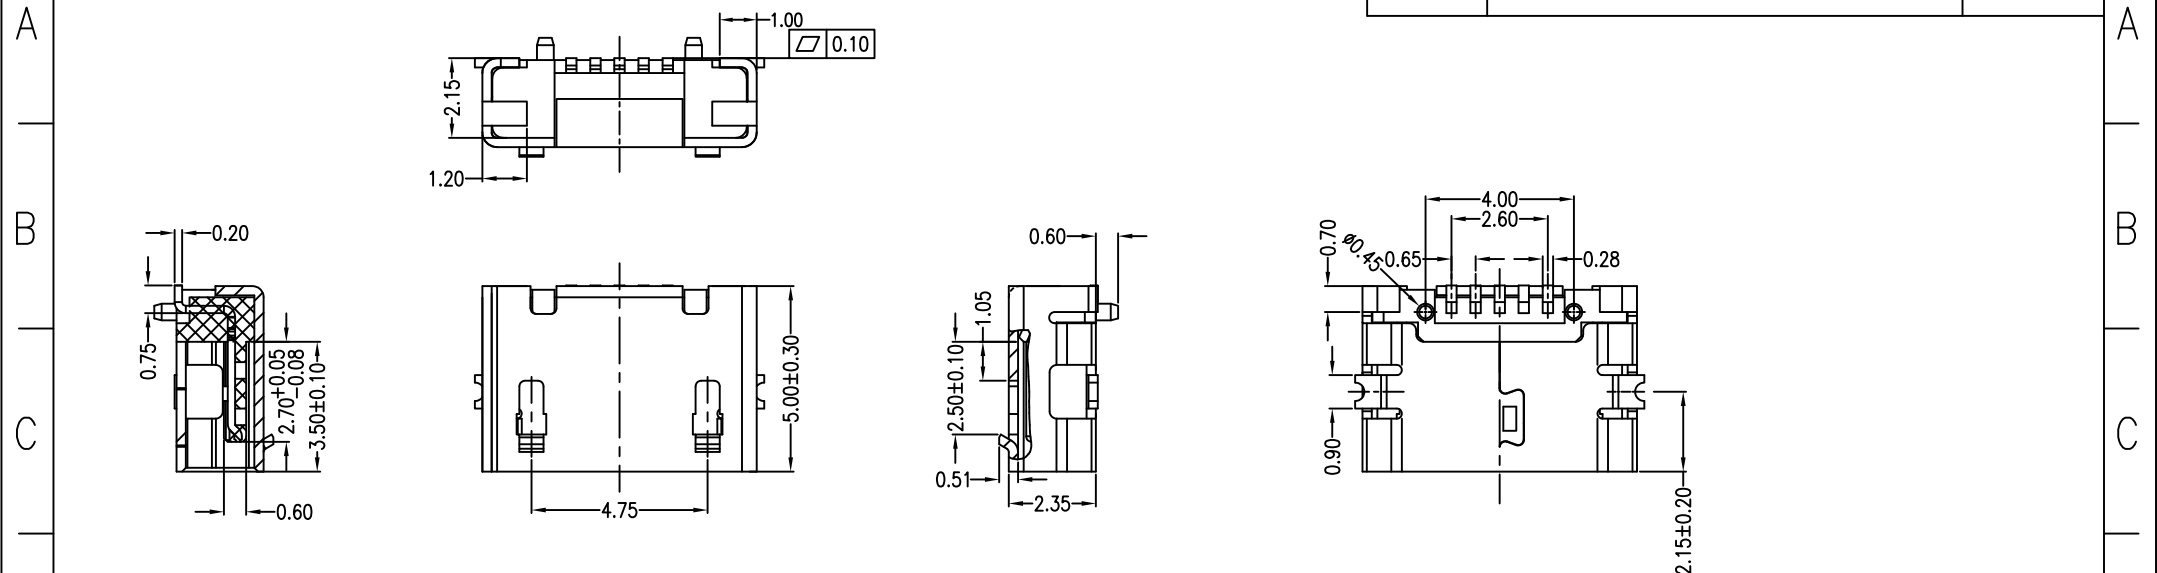

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f,UL94v-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper or sus304,t=0.25mm
 - Specification:
 - Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min
 - Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.			
公差一览表		单位	制图	制图料号	B920-ECD64A2021S10100
TOLERANCE UNLESS OTHERWISE		UNITS	DRAWING	PRODUCT PART NO.	
X.	±0.30	X.	±5°	产品名称	MICRO 5S B型两脚贴板无边不锈钢有柱
.X	±0.25	.X	±2°	PRODUCT NAME	加焊脚短端SMT
.XX	±0.15	.XX	±1°	角法	版本
.XXX	±0.10	.XXX	±0.5°	DATE	AD
		日期	2021-04-16	核淮	
		SCALE	1:1	APPD	
		日期	2021-04-16	核淮	
		角法		APPD	