

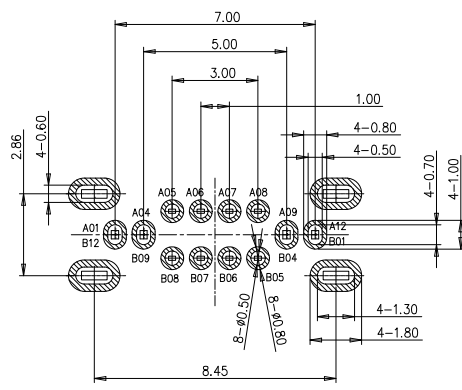
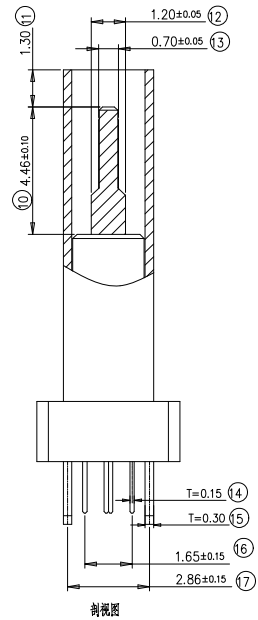
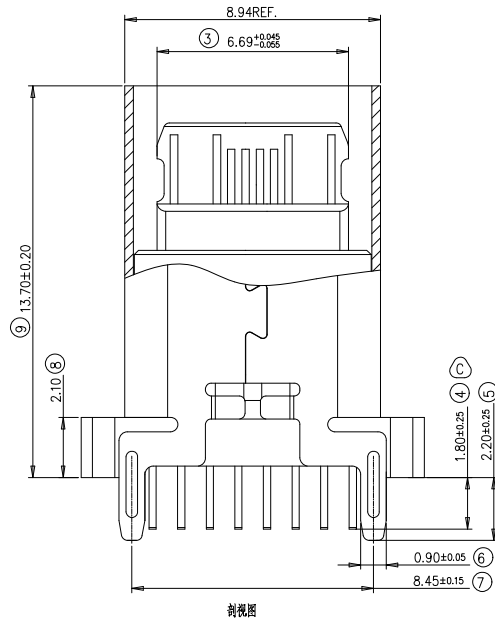
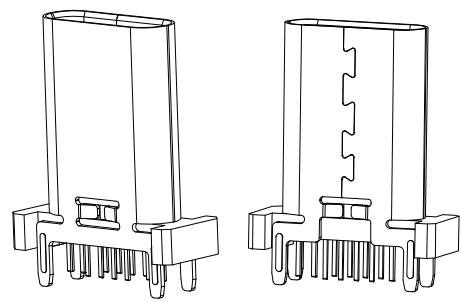


MAPX	MODIFICATION	DATE
------	--------------	------

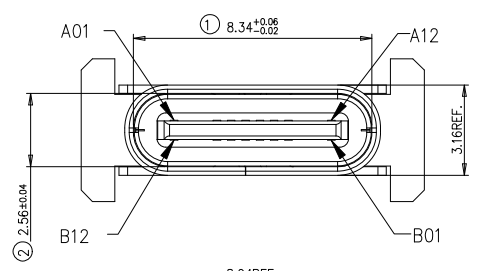

RECOMMENDED P.C.B. LAYOUT (俯视图)
TOLERANCE UNSPECIFIED ±0.05mm

- 特性:
- 一、电气性能: ELECTRICAL
 1. 额定电流: 5.0A
 2. 接触阻抗: 40 MILLIOHMS MAX
 3. 耐电压: 150V AC / 1 mA MAX
 4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN
 - 二、机械性能:
 1. 插入力: 5~20N
 2. 拔出力: 8~20N
 3. 使用寿命: 10000次, 拔出力 6N MIN
 - 三、材料: MATERIAL
 1. 塑胶: LCP/PA9T UL94V-0
 2. 端子: C7025/C18400 T=0.15MM
 3. 外壳: SUS304 T=0.30MM
 4. 卡勾: SUS304 T=0.15MM
 - 四、电镀 FINISH
 1. 端子: 接触点镀金3U"MIN
PIN 脚焊接区域镀金1U"MIN.
 2. 外壳: 镀锌50U"MIN (盐雾48H)
 - 五、电镀品需做盐雾测试: 盐雾面积达到95%以上.
 - 六、SMT回流焊(峰值260°C±5°C) 不能起泡, 熔胶, 变色不良(变形在公差范围以内)
 - 七、工作温度: -40°C~+85°C

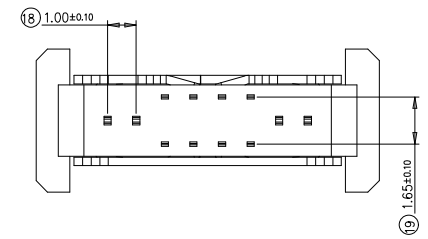

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART ENG 公差一览表 TOLERANCE UNLESS OTHERWISE		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.		制图料号 PRODUCT PART NO. C918-EC648K2027Y30009	
X.	±0.30	X.	±5.°	单位	MM
.X	±0.25	.X	±2.°	比例	1:1
.XX	±0.15	.XX	±1.°	日期	2019.11.23
.XXX	±0.10	.XXX	±0.5°	日期	2019.11.23
日期 DATE		制图 DRAWING ZY		审核 CHKD GT	
日期 DATE		批准 APPD GR18-EC648K2027Y30009		版本 VER A0	